


TrimLine Awning

Assembly Instructions

*Your TrimLine Awning can be used on any side of your canopy

PARTS LIST:

- (2) LD EII joints (Black arrows and Thumbscrews)
- (2) Awning EII Joints
- (4) Thumb-screws
- (5) 6" White Ball Bungees
- (2) Poles (coded AWN) - snap-buttons at each end
- (1) Male pole section – 61"
- (1) Female Pole Section – 58 1/4"
- (1) Vinyl Awning Cloth with grommets and zippers

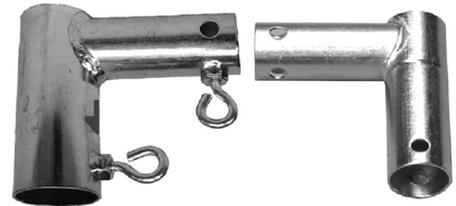


LD EII (Black Arrow)
LD 202

Awning EII
602

1. While assembling the canopy, before attaching legs to canopy frame, slide LD EII joints onto the upper leg sections of the two legs on the side where you would like the awning (black arrows point down). Loosely tighten thumbscrews to keep joint from sliding during set-up.

2. Complete assembly of your Canopy.



3. Slide the LD EII joints to the top of legs, without allowing them to slide up over the canopy corner joint. Point the open barrel outward and finger tighten the thumbscrews against the legs. Slide the "AWN"-coded poles into the EII's.

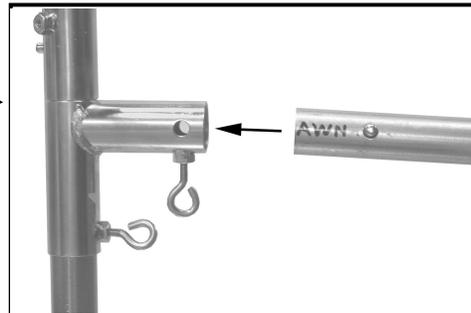

4. Attach Awning EII's to the no-color 116 1/2" pole.

5. Slide EII's onto protruding Awning poles to complete frame.



Note: Do not slide your LD EII's off the leg and onto the corner joint. The LD EII should be positioned as pictured, no higher.

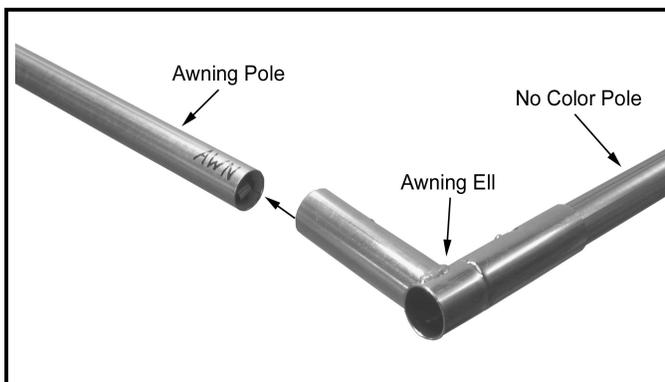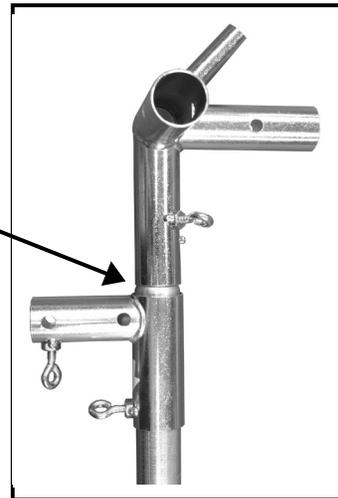

6. Zip Awning cloth to canopy roof (same zipper that you would use to attach a side-wall) and secure Velcro straps to the upper horizontal pole of the canopy.



7. Attach front edge of awning to outer pole of frame using the white ball bungees. At the corners, pull the loop around both angles of the joint at once and loop around ball. In the center, simply wrap around the pole and loop over the ball.



8. With the awning in place, adjust the Velcro at the corners of the canopy to allow the valence to lay smoothly over the awning.



Canopy valence adjusted

A note on using awnings on adjacent sides of your canopy:

If you will be using two awnings, you may wish to substitute a 3-Way joint for the Ells in the shared corner. If you would like wrap-around coverage, we offer an **Awning Corner Cloth** that simply Velcros into place to bridge the space between the two awnings.



3-Way Joint to receive two adjacent awnings



Awning Corner Cloth

Using your canopy sidewalls with Awnings:

You will find a second zipper on the awning that you can use to attach your sidewall. Although the walls will NOT zip together at the corners with the awning frame in place, there are other options for closing up.

- a. You may use the Velcro windstraps on the walls to attach them to the legs during business hours and then take your awning frame down in order to zip up securely at night. (Remove poles, loosen thumbscrews and swivel joints towards the interior of the canopy.)
- b. Our optional **Awning Zipper Strips** allow the sides to be zipped together without removing the awning frame.